



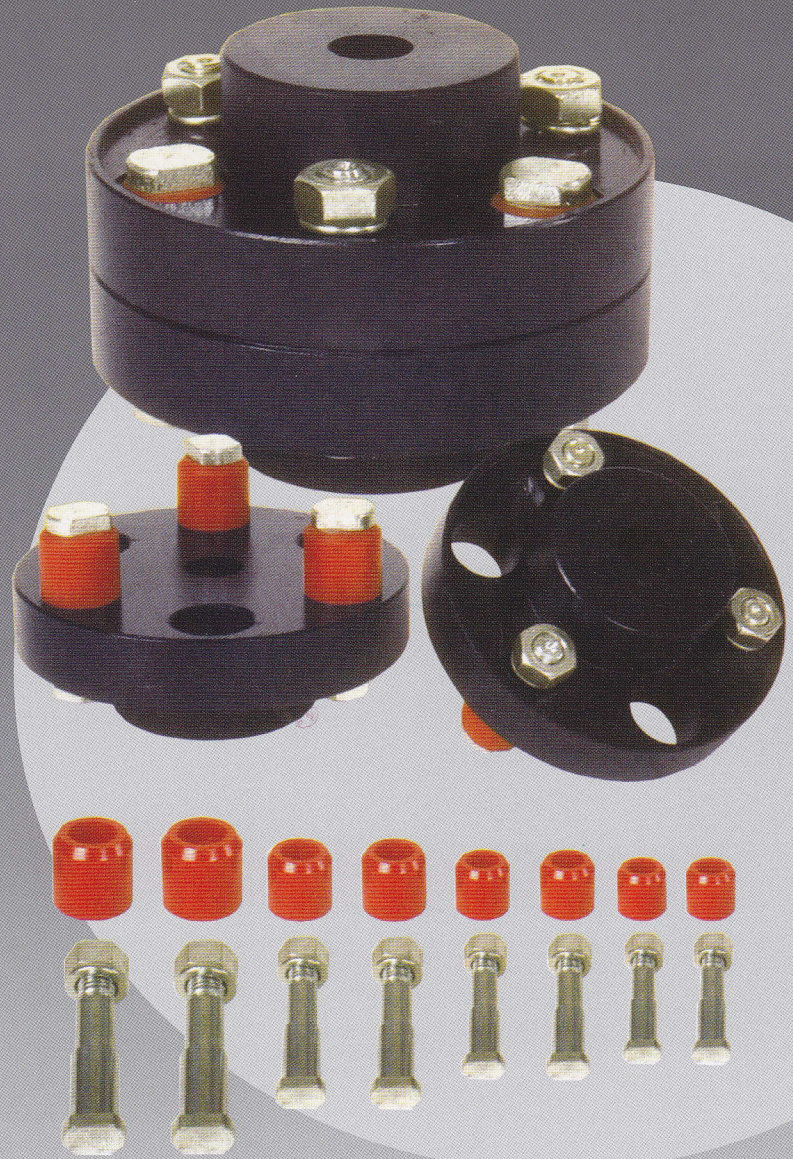

CROWN PIN FLEXIBLE COUPLINGS

COMPACT DESIGN NO LUBRICATION QUIET OPERATION

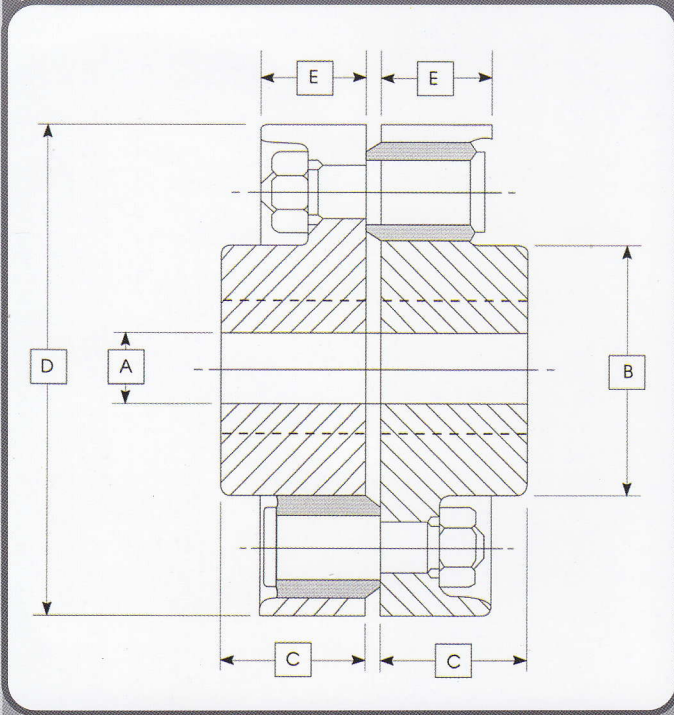

COUPLING NO.	BORE DIAMETER							CROWN PIN pcs.	WEIGHT (MASS) KG.
	STOCK BORE	MAX A	B	C	D	E			
	mm.	mm.	mm.	mm.	mm.	mm.			
SK - 7032 - 406	19	35	58	46	114	23	6P	3.8	
SK - 7032 - 506	19	45	66.5	46.5	127	24	6P	4.7	
SK - 7032 - 606	19	50	82.3	57	153	27.8	8P	8.4	
SK - 7032 - 708	19	65	100	63	177	31.8	8P	13.4	
SK - 7032 - 810	24	75	114	69	203	33.5	10P	19.7	
SK - 7032 - 912	24	85	131.2	72	230	33.5	12P	25.8	
SK - 7032 - 1012	44	95	142	77	253	38.5	12P	30.8	
SK - 7032 - 1212	50	120	175	93.5	305	52	12P	60.2	
SK - 7032 - 1414	62	150	220	107	356	57	14P	93	
SK - 7032 - 1616	62	160	260	120	405	60	16P	125	