




MOTOR SPARE PART LIST “EXPLODED DRAWING”

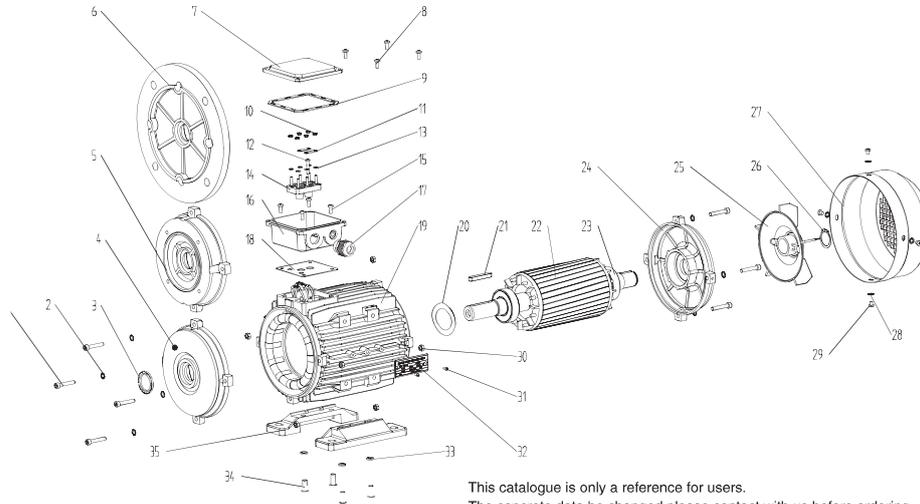

1. Screw
2. Gasket
3. Oil seal
4. Front endshield
5. B14 flange
6. B5 flange
7. TB cover
8. TB fixing screws
9. TB upper gasket
10. Terminal board fixing nut
11. Terminal bridge
12. Terminal pin
13. Terminal shim
14. Terminal board
15. TB fixing screws
16. TB base
17. Cable gland
18. TB bottomgasket
19. Frame
20. Preload washer
21. Key
22. Rotor
23. Bearing
24. NDE endshield
25. Cooling fan
26. Fan circlip
27. Fan cover
28. Fan cover fixing shim
29. Fan cover fixing screws
30. Endshield fixing nut
31. Rivet
32. Nameplate
33. Foot fixing nut
34. Foot fixing screws
35. Foot

This catalogue is only a reference for users.
The concrete data be changed please contact with us before ordering.

MOUNTINGS AND POSITIONS

Mountings and positions for standard motors, according to IEC 60034-7, and defined by the codes mentioned in the following table.

	Standards			Frame Sizes
	CEI 2-14	IEC 60034-7		56-200
		Code I	Code II	
	B3	IM B3	IM 1001	Standard
	B3/B5	IM B35	IM 2001	Standard
	B5	IM B5	IM 3001	Standard
	B14	IM B14	IM 4001	Standard
	B8	IM B8	IM 1071	Upon request
	B6	IM B6	IM 1051	Upon request
	B7	IM B7	IM 1061	Upon request

	Standards			Frame Sizes
	CEI 2-14	IEC 60034-7		56-200
		Code I	Code II	
	V1	IM V1	IM 3011	Standard
	V3	IM V3	IM 3031	Upon request
	V5	IM V5	IM 1011	Upon request
	V6	IM V6	IM 1031	Upon request
	V1/V5	IM V15	IM 2011	Upon request

Aluminum Housing Electric Motors Bearings & Oil Seals

Frame	Bearings		Oil Seals	
	Drive End	Non-drive End	Drive End	Non-drive End
56	6201	6201	12×22×5	12×22×5
63	6201	6201	12×24×5	12×24×5
71	6202	6202	15×25×7	15×25×7
80	6204	6204	20×34×7	20×34×7
90S	6205	6205(6204)※※	25×37×7	25×37×7(20×34×7)※※
90L	6205	6205(6204)※※	25×37×7	25×37×7(20×34×7)※※
100L	6206	6206	30×44×7	30×44×7
112M	6306	6206(6306)	30×44×7	30×44×7
132S	6308	6208(6308)	40×58×7	40×58×7
132M/L	6308	6208(6308)	40×58×7	40×58×7
160M	6309	6309	45×65×8	45×65×8
160L	6309	6309	45×65×8	45×65×8
180M	6311	6211	55×72×8	55×72×8
180L	6311	6211	55×72×8	55×72×8
200L	6312	6212	60×80×8	60×80×8

※ Other standards are also available on request, the figures in brackets() are for the MC/ML single phase motors



MS SERIES

THREE-PHASE ASYNCHRONOUS MOTORS ALUMINUM HOUSING

MS series aluminum housing three-phase asynchronous motors, with latest design in entirety, are made of selected quality materials and conform to the IEC standard.

MS motors have good performance, safety and reliable operation, nice appearance, and can be maintained very conveniently, while with low noises, little vibration and at the same time light weight and simple construction. These series motors can be used for general drive.



MS SERIES **IE1** EFFICIENCY MOTORS TECHNICAL DATA (at 50Hz)

Model	Power (KW)	Current (A)			Current (A)			Current (A)			Speed (r/min)	Eff. (%)	Power Factor (Cosφ)	T _{st} /T _n (Times)	T _{max} /T _n (Times)	T _{min} /T _n (Times)	I _{st} /I _n (Times)	Noise dB(A)	W.T (Kg)
		220V	380V	660V	230V	400V	690V	240V	415V	720V									
MS561-2	0.09	0.66	0.38	0.22	0.62	0.36	0.21	0.60	0.35	0.20	2710	53	0.72	2.2	2.3	2	4	58	2.60
MS562-2	0.12	0.73	0.42	0.24	0.69	0.40	0.23	0.67	0.39	0.22	2700	61	0.72	2.2	2.3	2	4	58	3.00
MS563-2	0.18	1.00	0.58	0.33	0.95	0.55	0.32	0.92	0.53	0.31	2710	63	0.75	2.2	2.4	1.6	6	61	4.00
MS631-2	0.18	1.00	0.58	0.33	0.95	0.55	0.32	0.92	0.53	0.31	2710	63	0.75	2.2	2.4	1.6	6	61	4.00
MS632-2	0.25	1.29	0.75	0.43	1.23	0.71	0.41	1.19	0.69	0.40	2710	65	0.78	2.2	2.4	1.6	6	61	4.20
MS633-2	0.37	1.92	1.11	0.64	1.82	1.05	0.61	1.76	1.02	0.59	2710	65	0.78	2.2	2.4	1.6	6	62	4.70
MS711-2	0.37	1.76	1.02	0.59	1.67	0.97	0.56	1.61	0.93	0.54	2730	70	0.79	2.2	2.4	1.6	6	64	5.20
MS712-2	0.55	2.57	1.49	0.86	2.45	1.42	0.82	2.36	1.36	0.79	2760	71	0.79	2.2	2.4	1.6	6	64	6.00
MS713-2	0.75	3.33	1.93	1.11	3.18	1.83	1.06	3.06	1.77	1.02	2730	72	0.82	2.2	2.4	1.5	6	65	7.00
MS801-2	0.75	3.21	1.86	1.07	3.06	1.77	1.02	2.94	1.70	0.98	2770	73	0.84	2.2	2.4	1.5	6	67	8.70
MS802-2	1.1	4.56	2.64	1.52	4.35	2.51	1.45	4.18	2.42	1.39	2770	76.2	0.83	2.2	2.4	1.5	6	67	10.00
MS803-2	1.5	6.04	3.50	2.01	5.87	3.32	1.92	5.54	3.20	1.85	2800	78.5	0.83	2.2	2.4	1.5	6	70	11.20
MS90S-2	1.5	5.97	3.46	1.99	5.76	3.28	1.90	5.47	3.16	1.82	2840	78.5	0.84	2.2	2.4	1.5	6	72	12.00
MS90L1-2	2.2	8.39	4.85	2.80	8.0	4.61	2.66	7.69	4.45	2.56	2840	81	0.85	2.2	2.4	1.4	6	72	14.50
MS90L2-2	3	11.1	6.42	3.69	10.6	6.10	3.52	10.2	5.88	3.39	2840	82.6	0.86	2.2	2.4	1.4	6	74	15.00
MS100L1-2	3	11.0	6.34	3.65	10.4	6.03	3.48	10.0	5.81	3.35	2840	82.6	0.87	2.2	2.3	1.4	7	76	20.00
MS100L2-2	4	14.3	8.30	4.78	13.7	7.88	4.55	13.1	7.60	4.38	2850	84.2	0.87	2.2	2.3	1.4	7.5	77	24.00
MS112M-2	4	14.3	8.30	4.78	13.7	7.88	4.55	13.1	7.60	4.38	2880	84.2	0.87	2.2	2.3	1.4	7.5	77	26.00
MS112L-2	5.5	19.1	11.1	6.38	18.2	10.5	6.08	17.5	10.1	5.85	2880	85.7	0.88	2.2	2.3	1.2	7.5	78	29.30
MS132S1-2	5.5	19.1	11.1	6.38	18.2	10.5	6.08	17.5	10.1	5.85	2900	85.7	0.88	2	2.2	1.2	7.5	80	38.40
MS132S2-2	7.5	25.7	14.9	8.57	24.5	14.1	8.16	23.6	13.6	7.86	2920	87	0.88	2	2.2	1.2	7.5	80	41.30
MS132M1-2	9.2	30.8	17.8	10.3	29.9	17.3	9.96	28.3	16.3	9.42	2930	88	0.89	2	2.2	1.2	7.5	81	48.20
MS132M2-2	11	36.3	21.0	12.1	34.6	20.0	11.5	33.3	19.2	11.1	2930	88.4	0.9	2	2.2	1.2	7.5	83	52.50
MS160M1-2	11	36.3	21.0	12.1	34.6	20.0	11.5	33.3	19.2	11.1	2940	88.4	0.9	2	2.2	1.2	7.5	86	76.00
MS160M2-2	15	48.4	28.0	16.1	46.1	26.6	15.4	44.4	25.7	14.8	2940	89.4	0.91	2	2.2	1.2	7.5	86	77.50
MS160L-2	18.5	59.3	34.3	19.8	56.5	32.6	18.8	54.3	31.4	18.1	2940	90	0.91	2	2.2	1.1	7.5	86	92.00
MS180M-2	22	71.3	41.3	23.8	68.2	39.2	22.6	65.3	37.8	21.8	2950	90	0.9	2	2.2	1.2	7.5	91	121.0
MS200L1-2	30	96.0	55.6	32.1	91.8	52.8	30.5	88.0	50.9	29.4	2950	91.2	0.9	2	2.2	1.2	7.5	94	144.0
MS200L2-2	37	117	67.9	39.2	112	64.5	37.2	108	62.2	35.9	2940	92	0.9	2	2.2	1.2	7.5	94	151.0
MS561-4	0.06	0.64	0.37	0.21	0.61	0.35	0.20	0.58	0.34	0.19	1360	50	0.56	2.3	2.4	2	4	50	2.90
MS562-4	0.09	0.82	0.47	0.27	0.78	0.45	0.26	0.75	0.43	0.25	1360	52	0.59	2.3	2.4	2	4	50	3.20

MS SERIES **IE1** EFFICIENCY MOTORS TECHNICAL DATA (at 50Hz)

Model	Power (KW)	Current (A)			Current (A)			Current (A)			Speed (r/min)	Eff. (%)	Power Factor (CosΦ)	T _{st} /T _n (Times)	T _{max} /T _n (Times)	T _{min} /T _n (Times)	I _s /I _n (Times)	Noise dB(A)	W.T (Kg)
		220V	380V	660V	230V	400V	690V	240V	415V	720V									
MS631-4	0.12	1.00	0.58	0.33	0.95	0.55	0.32	0.92	0.53	0.31	1360	52	0.64	2.2	2.4	2	4	52	3.70
MS632-4	0.18	1.28	0.74	0.43	1.21	0.70	0.40	1.17	0.67	0.39	1310	57	0.65	2.2	2.4	2	4	52	4.20
MS633-4	0.25	1.66	0.96	0.55	1.58	0.91	0.53	1.52	0.88	0.51	1340	60	0.66	2.2	2.2	2	4	54	5.00
MS711-4	0.25	1.52	0.88	0.51	1.45	0.84	0.48	1.39	0.81	0.46	1350	60	0.72	2.2	2.4	1.7	6	55	5.00
MS712-4	0.37	2.02	1.17	0.67	1.92	1.11	0.64	1.85	1.07	0.62	1370	65	0.74	2.2	2.4	1.7	6	55	5.80
MS713-4	0.55	2.92	1.69	0.97	2.78	1.60	0.93	2.67	1.55	0.89	1380	66	0.75	2.2	2.4	1.7	6	57	6.50
MS801-4	0.55	2.87	1.66	0.96	2.74	1.58	0.91	2.63	1.52	0.88	1370	67	0.75	2.2	2.4	1.7	6	58	8.10
MS802-4	0.75	3.50	2.03	1.17	3.34	1.93	1.11	3.21	1.86	1.07	1380	72	0.78	2.2	2.4	1.6	6	58	9.10
MS803-4	1.1	4.86	2.81	1.62	4.63	2.67	1.54	4.45	2.57	1.48	1390	76.2	0.78	2.2	2.4	1.6	6	60	11.00
MS90S-4	1.1	4.80	2.78	1.60	4.57	2.64	1.52	4.40	2.54	1.47	1400	76.2	0.79	2.2	2.4	1.6	6	61	11.70
MS90L1-4	1.5	6.27	3.63	2.09	5.97	3.45	1.99	5.75	3.32	1.92	1400	78.5	0.8	2.2	2.4	1.6	6	61	14.40
MS90L2-4	2.2	8.91	5.16	2.97	8.45	4.90	2.83	8.17	4.72	2.72	1400	81	0.8	2.2	2.4	1.5	7	63	17.60
MS100L1-4	2.2	8.80	5.09	2.93	8.38	4.84	2.79	8.07	4.66	2.69	1420	81	0.81	2.2	2.3	1.5	7	64	19.20
MS100L2-4	3	11.8	6.81	3.92	11.2	6.47	3.74	10.8	6.24	3.60	1420	82.6	0.81	2.2	2.3	1.5	7	64	22.50
MS100L3-4	4	15.2	8.80	5.07	14.2	8.36	4.83	13.9	8.06	4.65	1430	84.2	0.82	2.2	2.3	1.5	7	65	27.30
MS112M-4	4	15.0	8.70	5.01	14.3	8.26	4.77	13.8	7.96	4.59	1430	84.2	0.83	2.2	2.2	1.5	7	65	29.00
MS112L-4	5.5	20.3	11.7	6.76	19.3	11.2	6.44	18.6	10.8	6.20	1440	85.7	0.83	2.2	2.2	1.4	7	68	35.70
MS132S-4	5.5	20.1	11.6	6.68	19.1	11.0	6.37	18.4	10.6	6.13	1450	85.7	0.84	2.2	2.2	1.4	7	71	39.00
MS132M-4	7.5	26.6	15.4	8.87	25.4	14.6	8.45	24.4	14.1	8.13	1450	87	0.85	2.2	2.2	1.4	7	71	48.60
MS132L1-4	9.2	32.5	18.8	10.8	30.9	17.9	10.3	29.8	17.2	9.9	1460	87.5	0.85	2.2	2.2	1.4	7.5	74	56.50
MS132L2-4	11	38.0	22.0	12.7	36.2	20.9	12.1	34.8	20.1	11.6	1460	88.4	0.86	2.2	2.2	1.4	7.5	74	64.00
MS160M-4	11	37.5	21.7	12.5	35.8	20.6	11.9	34.4	19.9	11.5	1460	88.4	0.87	2.2	2.2	1.4	7	75	73.00
MS160L1-4	15	51.2	29.6	17.1	48.8	28.2	16.3	46.9	27.1	15.6	1460	88.4	0.87	2.2	2.2	1.4	7.5	75	88.50
MS160L2-4	18.5	63.1	36.5	21.0	60.1	34.7	20.0	57.9	33.5	19.3	1460	90.5	0.85	2.2	2.2	1.4	7.5	78	97.50
MS180M-4	18.5	62.4	36.1	20.8	59.7	34.3	19.8	57.2	33.1	19.1	1460	90.5	0.86	2.2	2.2	1.4	7.5	80	118.0
MS180L-4	22	73.8	42.7	24.7	70.6	40.6	23.4	67.7	39.1	22.6	1460	91	0.86	2.2	2.2	1.4	7.5	80	128.0
MS200L-4	30	99.5	57.6	33.2	95.1	54.7	31.6	91.2	52.7	30.4	1470	92	0.86	2.2	2.2	1.4	7.5	83	158.0
MS631-6	0.09	0.92	0.53	0.31	0.88	0.51	0.29	0.85	0.49	0.28	840	42	0.61	2	2	1.5	3.5	50	4.20
MS632-6	0.12	1.13	0.65	0.38	1.08	0.62	0.36	1.03	0.60	0.34	850	45	0.62	2	2	1.5	3.5	50	4.50
MS711-6	0.18	1.28	0.74	0.43	1.22	0.70	0.41	1.17	0.68	0.39	880	56	0.66	1.6	1.7	1.5	4	52	5.60
MS712-6	0.25	1.59	0.92	0.53	1.51	0.87	0.50	1.46	0.84	0.49	900	59	0.7	2.1	2.2	1.5	4	52	6.00
MS713-6	0.37	2.31	1.34	0.77	2.2	1.27	0.73	2.11	1.22	0.70	890	61	0.69	2	2.1	1.5	4	54	6.80
MS801-6	0.37	2.24	1.30	0.75	2.13	1.23	0.71	2.05	1.19	0.68	900	62	0.7	1.9	1.9	1.5	4	56	8.10
MS802-6	0.55	2.99	1.73	1.00	2.85	1.65	0.95	2.74	1.59	0.91	900	67	0.72	2	2.3	1.5	4	56	9.60
MS803-6	0.75	4.02	2.33	1.34	3.83	2.21	1.28	3.69	2.13	1.23	900	68	0.72	2	2.3	1.5	4	58	10.00
MS90S-6	0.75	3.96	2.29	1.32	3.77	2.18	1.26	3.63	2.10	1.21	920	69	0.72	2.2	2.2	1.5	5.5	59	11.30
MS90L1-6	1.1	5.49	3.18	1.83	5.23	3.02	1.74	5.03	2.91	1.68	925	72	0.73	2.2	2.2	1.3	5.5	59	14.40
MS90L2-6	1.5	7.09	4.11	2.36	6.76	3.90	2.25	6.50	3.76	2.17	925	74	0.75	2.2	2.2	1.3	5.5	60	15.50
MS100L1-6	1.5	7.00	4.05	2.33	6.67	3.85	2.22	6.42	3.71	2.14	945	74	0.76	2.2	2.2	1.3	6	61	18.80
MS100L2-6	2.2	9.87	5.71	3.29	9.40	5.43	3.13	9.04	5.23	3.01	950	77	0.76	2.2	2.2	1.3	6	63	19.80
MS112M-6	2.2	9.7	5.64	3.25	9.40	5.36	3.09	8.93	5.16	2.98	955	78	0.76	2.2	2.2	1.3	6	64	25.00
MS112L-6	3	12.9	7.49	4.31	12.3	7.12	4.11	11.9	6.86	3.95	950	79	0.77	2.2	2.2	1.3	6	64	30.00
MS132S-6	3	13.1	7.59	4.37	12.5	7.21	4.16	12.0	6.95	4.01	960	79	0.76	2	2	1.3	6.5	64	35.00
MS132M1-6	4	17.2	9.93	5.72	16.4	9.44	5.45	15.7	9.10	5.24	960	80.5	0.76	2	2	1.3	6.5	68	47.60
MS132M2-6	5.5	22.6	13.1	7.53	21.5	12.4	7.17	20.7	12.0	6.9	960	83	0.77	2	2	1.3	6.5	68	50.70
MS132L-6	7.5	30.1	17.4	10.0	28.7	16.5	9.55	27.6	15.9	9.2	960	85	0.77	2	2	1.3	6.5	68	47.60
MS160M-6	7.5	28.6	16.6	9.5	27.3	15.7	9.08	26.2	15.2	8.7	960	86	0.8	2	2.2	1.3	6.5	68	70.0
MS160L-6	11	41.8	24.2	13.9	39.8	23.0	13.3	38.3	22.1	12.8	960	87.5	0.79	2	2.2	1.2	6.5	73	87.0
MS180L-6	15	54.6	31.6	18.2	52.2	30.0	17.3	50.1	28.9	16.7	970	89	0.81	2	2.2	1.3	6.5	79	122.0
MS200L1-6	18.5	66.6	38.6	22.2	63.7	36.6	21.1	61.0	35.3	20.3	975	90	0.81	2	2.2	1.3	6.5	82	136.0
MS200L2-6	22	77.3	44.7	25.8	73.9	42.5	24.5	70.8	41.0	23.6	975	90	0.83	2	2.2	1.3	6.5	82	152.0
MS711-8	0.09	0.88	0.51	0.29	0.84	0.48	0.28	0.81	0.47	0.27	680	48	0.56	1.5	1.7	1.3	3	50	5.60
MS712-8	0.12	1.05	0.61	0.35	1.00	0.58	0.33	0.96	0.55	0.32	690	51	0.59	1.6	1.7	1.3	2.7	50	6.00
MS801-8	0.18	1.52	0.88	0.51	1.45	0.84	0.48	1.39	0.80	0.46	680	51	0.61	1.5	1.7	1.3	2.8	52	9.40
MS802-8	0.25	1.92	1.11	0.64	1.83	1.06	0.61	1.76	1.02	0.59	680	56	0.61	1.6	2	1.3	2.7	52	10.10
MS90S-8	0.37	2.45	1.42	0.82	2.33	1.35	0.78	2.24	1.30	0.75	680	63	0.63	1.6	1.8	1.3	2.8	56	12.50
MS90L-8	0.55	3.36	1.95	1.12	3.21	1.85	1.07	3.08	1.78	1.03	680	66	0.65	1.6	1.8	1.3	3	56	15.30
MS100L1-8	0.75	4.45	2.58	1.48	4.24	2.45	1.41	4.08	2.36	1.36	710	66	0.67	1.7	2.1	1.3	3.5	59	17.20
MS100L2-8	1.1	5.81	3.36	1.94	5.54	3.20	1.85	5.33	3.08	1.78	710	72	0.69	1.7	2.1	1.2	3.5	59	19.50
MS112M-8	1.5	7.82	4.53	2.61	7.45	4.30	2.48	7.17	4.15	2.39	710	74	0.68	1.8	2.1	1.2	4.2	61	25.50
MS132S-8	2.2	10.8	6.28	3.61	10.3	5.96	3.44	9.94	5.75	3.31	720	75	0.71	2	2	1.2	5.5	64	34.20
MS132M-8	3	14.0	8.11	4.67	13.3	7.70	4.45	12.8	7.43	4.28	720	77	0.73	2	2	1.2	5.5	64	40.00
MS160M1-8	4	18.0	10.4	5.99	17.1	9.89	5.71	16.5	9.53	5.49	730	80	0.73	1.9	2.1	1.2	6	68	59.00
MS160M2-8	5.5	23.4	13.5	7.79	22.3	12.9	7.42	21.4	12.4	7.14	720	83.5	0.74	2	2.2	1.2	6	68	69.00
MS160L-8	7.5	30.9	17.9	10.3	29.4	17.0	9.8	28.3	16.4	9.43	720	85	0.75	1.9	2.2	1.2	6	68	87.00
MS180L-8	11	45.2	26.2	15.1	43.6	25.1	14.5	41.5	24.0	13.8	715	87.4	0.73	1.9	2.2	1.2	6	78	125.0
MS200L-8	15	58.9	34.1	19.6	56.3	32.4	18.7	54.0	31.2	18.0	725	88.0	0.76	1.9</					

MSBCCL SERIES

ASYNCHRONOUS THREE-PHASE BRAKE MOTORS WITH SQUIRREL CAGE ROTOR DIRECT CURRENT BRAKE



MSBCCL SERIES-ENCLOSED CONSTRUCTION EXTERNALLY VENTILATED-SIZES 63~160

The brake-motors of the MSBCCL series result from coupling an asynchronous three-phase motor and an electromagnetic D.C. brake unit. Due to their reliability and operating safety, as well as their quick braking time (connection & disconnection time = 5~80 milliseconds) they are suitable for a great variety of applications, such as:

- Braking of loads or torques on the driving shaft.
- Braking of rotating masses to reduce any lost-time.
- Braking operations to increase the set-up precision.
- Braking of machine parts, according to safety rules.

TECHNICAL FEATURES

2 poles-3000rpm-50Hz

Brake motors have a $\pm 6\%$ tolerance on the supply voltage

Model	Power (KW)	Speed (r/min)	Eff. (%)	Power Factor (CosΦ)	Current (A)			T _a /T _n (Times)	T _{max} /T _n (Times)	T _{min} /T _n (Times)	I _s /I _n (Times)	Noise dB(A)
					230V	400V	690V					
MSBCCL631-2	0.18	2710	63	0.75	0.95	0.55	0.32	2.2	2.4	1.6	6	61
MSBCCL632-2	0.25	2710	65	0.78	1.23	0.71	0.41	2.2	2.4	1.6	6	61
MSBCCL633-2	0.37	2710	65	0.78	1.82	1.05	0.61	2.2	2.4	1.6	6	62
MSBCCL711-2	0.37	2730	70	0.79	1.67	0.97	0.56	2.2	2.4	1.6	6	64
MSBCCL712-2	0.55	2760	71	0.79	2.45	1.42	0.82	2.2	2.4	1.6	6	64
MSBCCL713-2	0.75	2730	72	0.82	3.18	1.83	1.06	2.2	2.4	1.5	6	65
MSBCCL801-2	0.75	2770	73	0.84	3.06	1.77	1.02	2.2	2.4	1.5	6	67
MSBCCL802-2	1.1	2770	76.2	0.83	4.35	2.51	1.45	2.2	2.4	1.5	6	67
MSBCCL803-2	1.5	2800	78.5	0.83	5.87	3.32	1.92	2.2	2.4	1.5	6	70
MSBCCL90S-2	1.5	2840	78.5	0.84	5.76	3.28	1.90	2.2	2.4	1.5	6	72
MSBCCL90L1-2	2.2	2840	81	0.85	8.0	4.61	2.66	2.2	2.4	1.4	6	72
MSBCCL90L2-2	3	2840	82.6	0.86	10.56	6.10	3.52	2.2	2.4	1.4	6	74
MSBCCL100L1-2	3	2840	82.6	0.87	10.44	6.03	3.48	2.2	2.3	1.4	7	76
MSBCCL100L2-2	4	2850	84.2	0.87	13.65	7.88	4.55	2.2	2.3	1.4	7.5	77
MSBCCL112M-2	4	2880	84.2	0.87	13.65	7.88	4.55	2.2	2.3	1.4	7.5	77
MSBCCL112L-2	5.5	2880	85.7	0.88	18.23	10.53	6.08	2.2	2.3	1.2	7.5	78
MSBCCL132S1-2	5.5	2900	85.7	0.88	18.23	10.53	6.08	2	2.2	1.2	7.5	80
MSBCCL132S2-2	7.5	2920	87	0.88	24.49	14.14	8.16	2	2.2	1.2	7.5	80
MSBCCL132M1-2	9.2	2930	88	0.89	29.87	17.25	9.96	2	2.2	1.2	7.5	81
MSBCCL132M2-2	11	2930	88.4	0.9	34.57	19.96	11.52	2	2.2	1.2	7.5	83
MSBCCL160M1-2	11	2940	88.4	0.9	34.57	19.96	11.52	2	2.2	1.2	7.5	86
MSBCCL160M2-2	15	2940	89.4	0.91	46.09	26.61	15.36	2	2.2	1.2	7.5	86
MSBCCL160L-2	18.5	2940	90	0.91	56.47	32.6	18.82	2	2.2	1.1	7.5	86

Type	Brake Type K	Brake Torque Nm	Brake Rated Power W	J Brake Pd ² Kgm ²	No. of Starts/hr. Under No Load	Delayed Cut-in Time ★ Msec.	Quick Cut-in Time Msec.	Cut Out Time Msec.	Noise dB(A)
MSBCCL63	K 1	5	15	0.00005	3000	45	20	10	62
MSBCCL 71	K 2	12	20	0.00014	3000	50	30	15	64
MSBCCL 80	K 3	16	25	0.00021	1300	55	30	15	67
MSBCCL 90S	K 4	20	30	0.00039	1100	65	40	15	72
●MSBCCL 90S	K 4 D	40	30	0.00078	1100	65	40	15	72
MSBCCL 90 L	K 4	20	30	0.00039	1100	65	40	15	72
●MSBCCL 90 L	K 4 D	40	30	0.00078	1100	65	40	15	72
MSBCCL 100 L	K 5	40	45	0.00104	900	75	45	20	76
●MSBCCL 100 L	K 6	60	50	0.00135	900	180	85	25	76
MSBCCL 112 MT	K 5	40	45	0.00104	880	75	45	20	77
MSBCCL 112 M	K 6	60	50	0.00135	880	180	85	25	78
MSBCCL 132 S	K 7	90	55	0.00219	480	200	95	50	80
●MSBCCL 132 S	K 7 D	180	55	0.00438	480	200	95	50	80
MSBCCL 132 M	K 7	90	55	0.00219	450	200	95	50	80
●MSBCCL 132 M	K 7 D	180	55	0.00438	480	200	95	50	80
MSBCCL 160 MT	K 7 D	180	55	0.00438	350	200	95	50	86
MSBCCL 160 L	K 8	200	60	0.00408	350	210	100	60	86
●MSBCCL 160 L	K 8 D	400	60	0.00816	350	210	100	60	86

● Motor with increased braking torque on request

★ On request, delayed brake cut in time for lifting equipments. We suggest double disk brake D for lifting equipments.



TECHNICAL FEATURES

4 poles-1500rpm-50Hz

Brake motors have a $\pm 6\%$ tolerance on the supply voltage

Model	Power (KW)	Speed (r/min)	Eff. (%)	Power Factor (CosΦ)	Current (A)			T _{st} /T _n (Times)	T _{max} /T _n (Times)	T _{min} /T _n (Times)	I _{st} /I _n (Times)	Noise dB(A)
					230V	400V	690V					
MSBCCL631-4	0.12	1350	57	0.64	0.82	0.47	0.27	2.2	2.4	1.7	6	52
MSBCCL632-4	0.18	1350	59	0.65	1.17	0.68	0.39	2.2	2.4	1.7	6	52
MSBCCL633-4	0.25	1350	60	0.66	1.58	0.91	0.53	2.2	2.4	1.7	6	54
MSBCCL711-4	0.25	1350	60	0.72	1.45	0.84	0.48	2.2	2.4	1.7	6	55
MSBCCL712-4	0.37	1370	65	0.74	1.92	1.11	0.64	2.2	2.4	1.7	6	55
MSBCCL713-4	0.55	1380	66	0.75	2.78	1.60	0.93	2.2	2.4	1.7	6	57
MSBCCL801-4	0.55	1370	67	0.75	2.74	1.58	0.91	2.2	2.4	1.7	6	58
MSBCCL802-4	0.75	1380	72	0.78	3.34	1.93	1.11	2.2	2.4	1.6	6	58
MSBCCL803-4	1.1	1390	76.2	0.78	4.63	2.67	1.54	2.2	2.4	1.6	6	60
MSBCCL90S-4	1.1	1400	76.2	0.79	4.57	2.64	1.52	2.2	2.4	1.6	6	61
MSBCCL90L-4	1.5	1400	78.5	0.8	5.97	3.45	1.99	2.2	2.4	1.6	6	61
MSBCCL90L2-4	2.2	1400	81	0.8	8.45	4.90	2.83	2.2	2.4	1.5	7	63
MSBCCL100L1-4	2.2	1420	81	0.81	8.38	4.84	2.79	2.2	2.3	1.5	7	64
MSBCCL100L2-4	3	1420	82.6	0.81	11.21	6.47	3.74	2.2	2.3	1.5	7	64
MSBCCL100L3-4	4	1430	84.2	0.82	14.18	8.36	4.83	2.2	2.3	1.5	7	65
MSBCCL112M-4	4	1430	84.2	0.83	14.31	8.26	4.77	2.2	2.2	1.5	7	65
MSBCCL112L-4	5.5	1440	85.7	0.83	19.33	11.16	6.44	2.2	2.2	1.4	7	68
MSBCCL132S-4	5.5	1450	85.7	0.84	19.1	11.03	6.37	2.2	2.2	1.4	7	71
MSBCCL132M-4	7.5	1450	87	0.85	25.35	14.64	8.45	2.2	2.2	1.4	7	71
MSBCCL132L1-4	9.2	1460	87.5	0.85	30.92	17.85	10.31	2.2	2.2	1.4	7.5	74
MSBCCL132L2-4	10	1460	88	0.85	33.42	19.3	11.14	2.2	2.2	1.4	7.5	74
MSBCCL132L2-4	11	1460	88.4	0.86	36.17	20.88	12.06	2.2	2.2	1.4	7.5	74
MSBCCL160M-4	11	1460	88.4	0.87	35.76	20.64	11.92	2.2	2.2	1.4	7	75
MSBCCL160L-4	15	1460	88.4	0.87	48.76	28.15	16.25	2.2	2.2	1.4	7.5	75

Type	Brake Type K	Brake Torque Nm	Brake Rated Power W	J Brake Pd ² Kg ²	No. of Starts/hr. Under No Load	Delayed Cut-in Time ★ Msec.	Quick Cut-in Time Msec.	Cut Out Time Msec.	Noise dB(A)
MSBCCL63	K 1	5	15	0.00005	3000	45	20	10	52
MSBCCL 71	K 2	12	20	0.00014	3000	50	30	15	55
MSBCCL 80	K 3	16	25	0.00021	1300	55	30	15	58
MSBCCL 90S	K 4	20	30	0.00039	1100	65	40	15	61
●MSBCCL 90S	K 4 D	40	30	0.00078	1100	65	40	15	61
MSBCCL 90 L	K 4	20	30	0.00039	1100	65	40	15	63
●MSBCCL 90 L	K 4 D	40	30	0.00078	1100	65	40	15	63
MSBCCL 100 L	K 5	40	45	0.00104	900	75	45	20	64
●MSBCCL 100 L	K 6	60	50	0.00135	900	180	85	25	65
MSBCCL 112 MT	K 5	40	45	0.00104	880	75	45	20	65
MSBCCL 112 M	K 6	60	50	0.00135	880	180	85	25	65
MSBCCL 132 S	K 7	90	55	0.00219	480	200	95	50	71
●MSBCCL 132 S	K 7 D	180	55	0.00438	480	200	95	50	71
MSBCCL 132 M	K 7	90	55	0.00219	450	200	95	50	71
●MSBCCL 132 M	K 7 D	180	55	0.00438	480	200	95	50	71
MSBCCL 160 MT	K 7 D	180	55	0.00438	350	200	95	50	75
MSBCCL 160 L	K 8	200	60	0.00408	350	210	100	60	75
●MSBCCL 160 L	K 8 D	400	60	0.00816	350	210	100	60	75

● Motor with increased braking torque on request

★ On request, delayed brake cut in time for lifting equipments. We suggest double disk brake D for lifting equipments.

TECHNICAL FEATURES

6 poles-1000rpm-50Hz

Brake motors have a $\pm 6\%$ tolerance on the supply voltage

Model	Power (KW)	Speed (r/min)	Eff. (%)	Power Factor (CosΦ)	Current (A)			T _{st} /T _n (Times)	T _{max} /T _n (Times)	T _{max} /T _s (Times)	I _{st} /I _n (Times)	Noise dB(A)
					230V	400V	690V					
MSBCCL631-6	0.09	840	42	0.61	0.88	0.51	0.29	2	2	1.5	3.5	50
MSBCCL632-6	0.12	850	45	0.62	1.08	0.62	0.36	2	2	1.5	3.5	50
MSBCCL711-6	0.18	880	56	0.66	1.22	0.70	0.41	1.6	1.7	1.5	4	52
MSBCCL712-6	0.25	900	59	0.7	1.51	0.87	0.50	2.1	2.2	1.5	4	52
MSBCCL713-6	0.37	890	61	0.69	2.2	1.27	0.73	2	2.1	1.5	4	54
MSBCCL801-6	0.37	900	62	0.7	2.13	1.23	0.71	1.9	1.9	1.5	4	56
MSBCCL802-6	0.55	900	67	0.72	2.85	1.65	0.95	2	2.3	1.5	4	56
MSBCCL803-6	0.75	900	68	0.72	3.83	2.21	1.28	2	2.3	1.5	4	58
MSBCCL90S-6	0.75	920	69	0.72	3.77	2.18	1.26	2.2	2.2	1.5	5.5	59
MSBCCL90L-6	1.1	925	72	0.73	5.23	3.02	1.74	2.2	2.2	1.3	5.5	59
MSBCCL100L-6	1.5	945	74	0.76	6.67	3.85	2.22	2.2	2.2	1.3	6	61
MSBCCL112M-6	2.2	955	78	0.76	9.28	5.36	3.09	2.2	2.2	1.3	6	64
MSBCCL132S-6	3	960	79	0.76	12.49	7.21	4.16	2	2	1.3	6.5	64
MSBCCL132M1-6	4	960	80.5	0.76	16.35	9.44	5.45	2	2	1.3	6.5	68
MSBCCL132M2-6	5.5	960	83	0.77	21.51	12.42	7.17	2	2	1.3	6.5	68
MSBCCL132L-6	7.5	960	85	0.77	28.65	16.54	9.55	2	2	1.3	6.5	68
MSBCCL160M-6	7.5	960	86	0.8	27.25	15.73	9.08	2	2.2	1.3	6.5	68
MSBCCL160L-6	11	960	87.5	0.79	39.78	22.97	13.26	2	2.2	1.2	6.5	73

Type	Brake Type K	Brake Torque Nm	Brake Rated Power W	J Brake Pd ² Kg m ²	No. of Starts/hr. Under No Load	Delayed Cut-in Time ★ Msec.	Quick Cut-in Time Msec.	Cut Out Time Msec.	Noise dB(A)
MSBCCL63	K 1	5	15	0.00005	3000	45	20	10	50
MSBCCL 71	K 2	12	20	0.00014	3000	50	30	15	52
MSBCCL 80	K 3	16	25	0.00021	1300	55	30	15	56
MSBCCL 90S	K 4	20	30	0.00039	1100	65	40	15	59
●MSBCCL 90S	K 4 D	40	30	0.00078	1100	65	40	15	59
MSBCCL 90 L	K 4	20	30	0.00039	1100	65	40	15	59
●MSBCCL 90 L	K 4 D	40	30	0.00078	1100	65	40	15	59
MSBCCL 100 L	K 5	40	45	0.00104	900	75	45	20	61
●MSBCCL 100 L	K 6	60	50	0.00135	900	180	85	25	61
MSBCCL 112 MT	K 5	40	45	0.00104	880	75	45	20	64
MSBCCL 112 M	K 6	60	50	0.00135	880	180	85	25	64
MSBCCL 132 S	K 7	90	55	0.00219	480	200	95	50	64
●MSBCCL 132 S	K 7 D	180	55	0.00438	480	200	95	50	64
MSBCCL 132 M	K 7	90	55	0.00219	450	200	95	50	68
●MSBCCL 132 M	K 7 D	180	55	0.00438	480	200	95	50	68
MSBCCL 160 MT	K 7 D	180	55	0.00438	350	200	95	50	68
MSBCCL 160 L	K 8	200	60	0.00408	350	210	100	60	73
●MSBCCL 160 L	K 8 D	400	60	0.00816	350	210	100	60	73

● Motor with increased braking torque on request

★ On request, delayed brake cut in time for lifting equipments. We suggest double disk brake D for lifting equipments.



TECHNICAL FEATURES

8 poles-750rpm-50Hz

Brake motors have a $\pm 6\%$ tolerance on the supply voltage

Model	Power (KW)	Speed (r/min)	Eff. (%)	Power Factor (CosΦ)	Current (A)			T _{st} /T _n (Times)	T _{max} /T _n (Times)	T _{min} /T _n (Times)	I _s /I _n (Times)	Noise dB(A)
					230V	400V	690V					
MSBCCL711-8	0.09	680	48	0.56	0.84	0.48	0.28	1.5	1.7	1.3	3	50
MSBCCL712-8	0.12	690	51	0.59	1.00	0.58	0.33	1.6	1.7	1.3	2.7	50
MSBCCL801-8	0.18	680	51	0.61	1.45	0.84	0.48	1.5	1.7	1.3	2.8	52
MSBCCL802-8	0.25	680	56	0.61	1.83	1.06	0.61	1.6	2	1.3	2.7	52
MSBCCL90S-8	0.37	680	63	0.63	2.33	1.35	0.78	1.6	1.8	1.3	2.8	56
MSBCCL90L-8	0.55	680	66	0.65	3.21	1.85	1.07	1.6	1.8	1.3	3	56
MSBCCL100L1-8	0.75	710	66	0.67	4.24	2.45	1.41	1.7	2.1	1.3	3.5	59
MSBCCL100L2-8	1.1	710	72	0.69	5.54	3.20	1.85	1.7	2.1	1.2	3.5	59
MSBCCL112M-8	1.5	710	74	0.68	7.45	4.30	2.48	1.8	2.1	1.2	4.2	61
MSBCCL132S-8	2.2	720	75	0.71	10.33	5.96	3.44	2	2	1.2	5.5	64
MSBCCL132M-8	3	720	77	0.73	13.34	7.70	4.45	2	2	1.2	5.5	64
MSBCCL160M1-8	4	730	80	0.73	17.12	9.89	5.71	1.9	2.1	1.2	6	68
MSBCCL160M2-8	5.5	720	83.5	0.74	22.25	12.85	7.42	2	2.2	1.2	6	68
MSBCCL160L-8	7.5	720	85	0.75	29.41	17.0	9.8	1.9	2.2	1.2	6	68

Type	Brake Type K	Brake Torque Nm	Brake Rated Power W	J Brake Pd ² Kg ^m ²	No. of Starts/hr. Under No Load	Delayed Cut-in Time ★ Msec.	Quick Cut-in Time Msec.	Cut Out Time Msec.	Noise dB(A)
63 MSBCCL	K 1	5	15	0.00005	3000	45	20	10	50
71 MSBCCL	K 2	12	20	0.00014	3000	50	30	15	50
80 MSBCCL	K 3	16	25	0.00021	1300	55	30	15	52
90 S MSBCCL	K 4	20	30	0.00039	1100	65	40	15	56
●90 S MSBCCL	K 4 D	40	30	0.00078	1100	65	40	15	56
90 L MSBCCL	K 4	20	30	0.00039	1100	65	40	15	56
●90 L MSBCCL	K 4 D	40	30	0.00078	1100	65	40	15	56
100 L MSBCCL	K 5	40	45	0.00104	900	75	45	20	59
●100 L MSBCCL	K 6	60	50	0.00135	900	180	85	25	59
112 MT MSBCCL	K 5	40	45	0.00104	880	75	45	20	61
112 M MSBCCL	K 6	60	50	0.00135	880	180	85	25	61
132 S MSBCCL	K 7	90	55	0.00219	480	200	95	50	64
●132 S MSBCCL	K 7 D	180	55	0.00438	480	200	95	50	64
132 M MSBCCL	K 7	90	55	0.00219	450	200	95	50	64
●132 M MSBCCL	K 7 D	180	55	0.00438	480	200	95	50	64
160 MT MSBCCL	K 7 D	180	55	0.00438	350	200	95	50	68
160 L MSBCCL	K 8	200	60	0.00408	350	210	100	60	68
●160 L MSBCCL	K 8 D	400	60	0.00816	350	210	100	60	68

● Motor with increased braking torque on request

★ On request, delayed brake cut in time for lifting equipments. We suggest double disk brake D for lifting equipments.

MSBCCL SERIES BRAKE MOTORS

Operating Principle

The direct current brake is fed by means of an electronic circuit with diode bridge (rectifier) situated inside the terminal-box. When feeding the electromagnet (5), the movable anchor (4) is attracted towards the same, thus loading the braking torque springs (9) and allowing the disk (2), equipped with friction packing and fitted on the groove hub (6) to turn solitary the motor shaft (1) by means of a key (7). By interrupting the feeding, the movable anchor (4), pushed by the braking torque springs (9), exerts a pressure upon the friction surface of the disk (2), thus causing its stopping.

Adjustment Of The Air Gap

The air gap (11) is the distance between the electromagnet (5) and the movable anchor (9).

The air gap has to be regularly checked, since due to the wear of the friction packing (2) it tends to increase.

Act on the brake adjusters (3) after having unloosen the screws (8) to bring the air gap to the required value.





Act on the ring nut (10) which acts on the braking torque springs (9) to adjust the braking torque.

Pls. contact our technical department for information on the air gap adjustment values.

Hand Release With Lever

Upon request a hand release with lever can be supplied.

In case of a current cutoff, acting on the lever (12), the release, connected to the movable anchor (4) overcomes the springs pressure, thus detaching the movable anchor from the disc friction packing (2) allowing the shaft to turn.

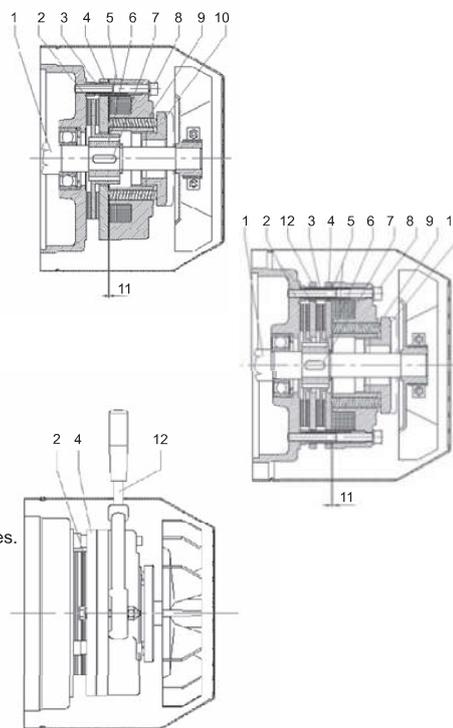

Spare Parts

1. Front bearing
2. Front shield
3. Winding
4. Frame with stator package
5. Shaft with rotor
6. Rear bearing
7. Spring
8. Rear shield
9. Adjusting bush
10. Brake disc
11. Moving anchor
12. Electromagnet coil with diode
13. Fixing screws for brake
14. Cooling fan
15. Fan hood
16. Ring nut
17. Spring
18. See gearing
19. Key brake side
20. Toothed pinion
21. Fixing screw for fan hood
22. Fixing crew for terminal-box
23. Terminal-box
24. Able-holder
25. Packing
26. Terminal-block
27. Tie-bolt
28. Coupling side key
29. Fixing screw for shield
30. Flange shield